
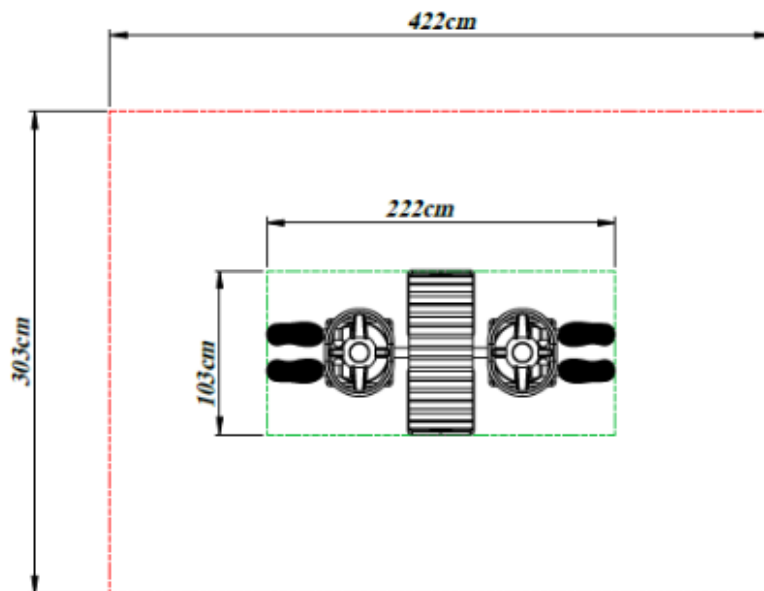
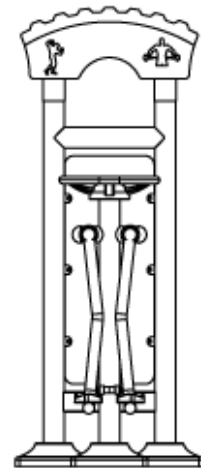


PB-06 Signposted Leg Opening Tool

- The double leg opening device with panel consists of two stations that can be used by one person or two people.
- It is designed to be used to grow and stretch the leg muscles.
- Carrier pipes are manufactured from pipes with a diameter of at least Ø 114 mm and a wall thickness of 2.5-3 mm.
- Ø114 SDM pipes will be used at 4 points where the apparatus to be used in the connection of the main carriers and the assembly of the panel will be welded.
- Digital printing is made on 2 mm thick dkp sheet material on the panel, which will be mounted on a minimum 4 mm apparatus on the main carrier.
- The moving parts connected to the main body are manufactured with a wall thickness of at least Ø 60 mm and 2.5-3 mm and in one piece with a special twist.
- The main body flashes are manufactured by laser cutting from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and 4 pieces of flag sheet are welded in order to increase the flange strength.
- Anchor covers measuring Ø114 mm in accordance with the design to fully grasp the carrier pipes are used to close the open-ended pipes in fitness products.
- Anchor covers are produced from polyethylene plastic material by LLDPE (Linear Low Density Polyethylene) injection method.
- It is designed to be resistant to UV lights and not to harm the user.
- It is manufactured as a double wall and its installation is provided with a screwing system.
- Fitness carrier pipes are manufactured from pipes with a wall thickness of at least Ø 139 mm and 2.5-3 mm.
- Anchor covers measuring ø139 mm are used for the purpose of closing open-ended pipes in children's playgroup, fitness products.
- The pivoting shaft connected to the main body is fixed as a single piece by pulling the welding all around, and 4 6006 2rs bearings are used for the moving parts.
- The moving parts connected to the main body are at least Ø 60 mm and 2.5-3 mm wall thickness.
- 2 Pieces of 6006 2RS Ball bearings are used in the movable joint hubs.
- Movable parts are manufactured by twisting the Ø 60 mm 3 mm thick pipe accordingly.
- A circularly bent handle made of Ø 33 mm 2.5-3 mm thick pipe is mounted on the main body so that the user can receive support with his hands while working.

- There are 4 foot pressing pedals produced by injection printing method from fiber-blended polyethylene material in the foot pressing section.
- The patterned edges are raised to prevent the foot from slipping, and the footrest is fixed to a 5 mm thick sheet metal.
- The main body flashes are manufactured by laser cutting from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and are reinforced with flag sheets with a thickness of 5 mm in order to increase their strength.
- Fitness roof is produced from polyethylene plastic material by rotation method.
- The upper part is designed serrated to prevent rain, snow, etc. from puddles of water.
- It is mounted to the main body with protrusions located at the base.
- There are no sharp edges and corners that will harm the user.

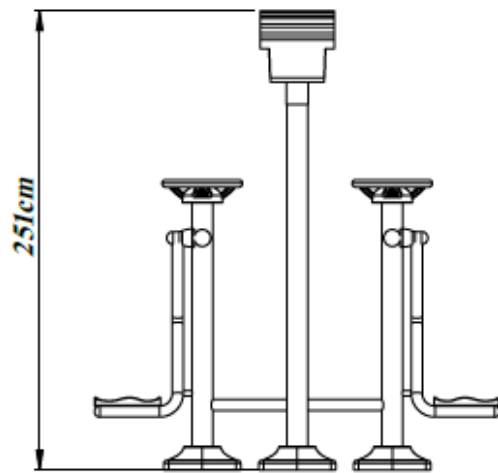

Dimensions	Width	103 cm
	Length	122 cm
	Height	251 cm