


PC-03 Plastic Merry Go Round

- Ø 114 pipes located in the center of rotation are installed with a diameter of Ø 32 mm, which will be used as a holding element.
- In order to increase the ground strength, metal with a thickness of Ø400 * 10 mm is used under the platform.
- The core and shaft assembly are manufactured by turning from steel shafts and tensile steel pipes of the appropriate diameter.
- Rotational movement is provided by using 2 tapered roller bearings and 1 fixed roller bearing in the hub.
- Pipes with a diameter of Ø 32 mm, which will be used as a holding element, are installed on the Ø 114 pipe located in the center of rotation.
- It is made of LLDPE (Linear Low Density Polyethylene) self-colored polyethylene plastic material in one piece with rotation.
- The product must be ergonomically designed so that the user can sit comfortably.
- The product is designed in such a way that there are no sharp edges, corners or any roughness that may cause injury.

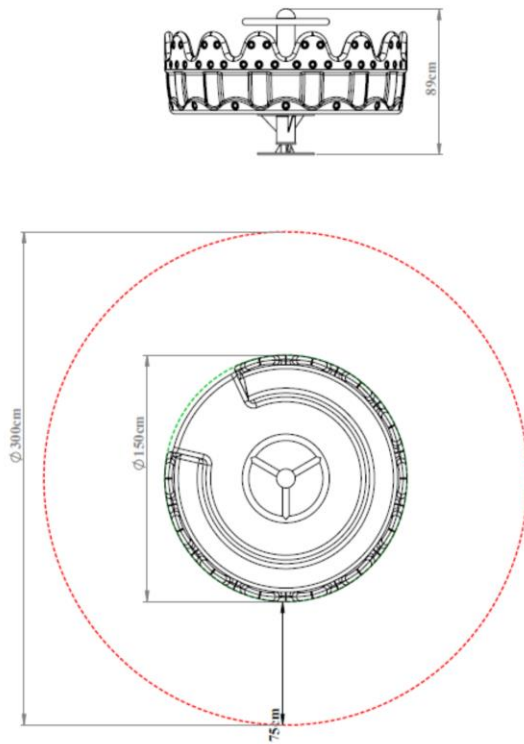

Dimensions	Merry-Go-Round Length	150 cm
	Merry-Go-Round Height	89 cm
Features	Raw materials	LLDPE