
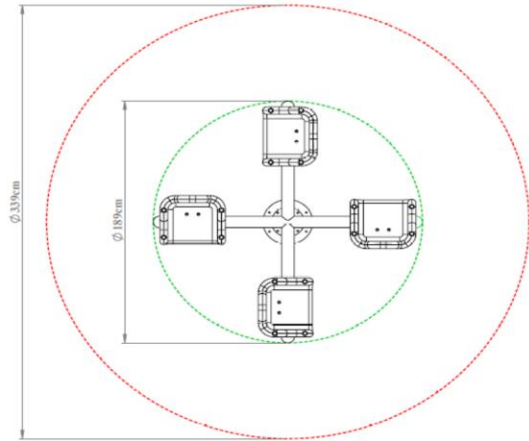


## PC-08

## Four Armed Merry Go Round

- The rotating metal assembly is formed by the installation of pipes with a diameter of  $\text{Ø } 114\text{mm} \pm 5\text{mm}$  and a height of at least  $60\text{cm} \pm 10\text{cm}$ , pipes with a diameter of  $\text{Ø } 89\text{mm} \pm 5\text{mm}$  and a length of at least  $189\text{cm} \pm 10\text{cm}$ .
- The swivel seats are designed to wrap the user's body and are made of LLDPE (Linear Low Density Polyethylene), a self-colored polyethylene plastic material weighing at least 2.5 kg.
- The metal hitch installation of the seats is provided by the method of screwing through bolts and nuts.
- The core and shaft assembly are manufactured by turning from steel shafts and tensile steel pipes of the appropriate diameter.
- Rotational movement is provided by using 2 tapered roller bearings and 1 fixed roller bearing in the hub.
- In order to close the open-ended pipes; anchor covers made of double-walled self-colored polyethylene plastic material LLDPE (Linear Low Density Polyethylene) are used.

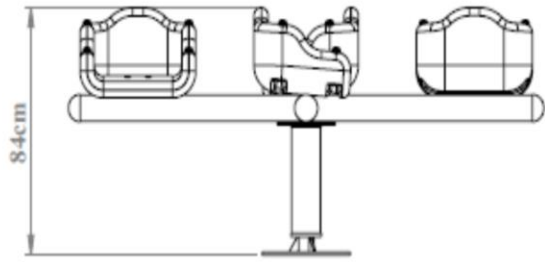

<b>Dimensions</b>	Merry-Go-Round Length	189 cm
	Merry-Go-Round Height	84 cm
<b>Features</b>	Raw materials	LLDPE