
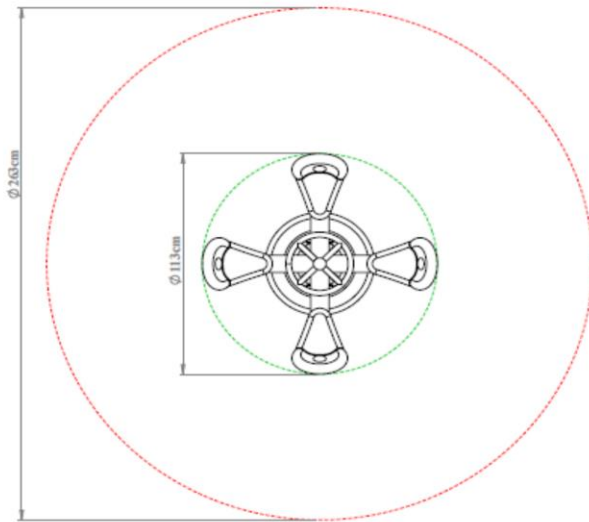


PC-09

Mini Merry Go Round

- The mini merry go round consists of 4 seats, Ø 114 mm, Ø 89 mm, Ø60 mm and Ø 32 mm pipes welded together by the Linear Low Density Polyethylene (LLDPE) rotation molding method made of self-colored polyethylene plastic material.
- For comfortable and safe use on the product, footrests and hand grips are designed and manufactured with Ø 32 mm pipes and Ø 27 pipes within the ergonomics rules.
- The metal hitch installation of the seats are provided by the method of screwing through bolts and nuts.
- The core and shaft assembly are manufactured by turning from steel shafts and tensile steel pipes of the appropriate diameter.
- Rotational movement is provided by using 2 tapered roller bearings and 1 fixed roller bearing in the hub.
- In order to close the open-ended pipes; anchor covers made of double-walled self-colored polyethylene plastic material LLDPE (Linear Low Density Polyethylene) are used.
- The seat is manufactured from self-colored polyethylene plastic material weighing at least 1 kg by LLDPE (Linear Low Density Polyethylene) rotation molding method.
- The seat is designed in a form that prevents the user from sliding backwards.

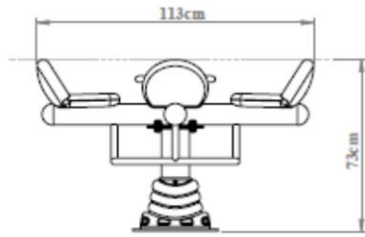

Dimensions	Merry-Go-Round Length	113 cm
	Merry-Go-Round Height	73 cm
Features	Raw materials	LLDPE