
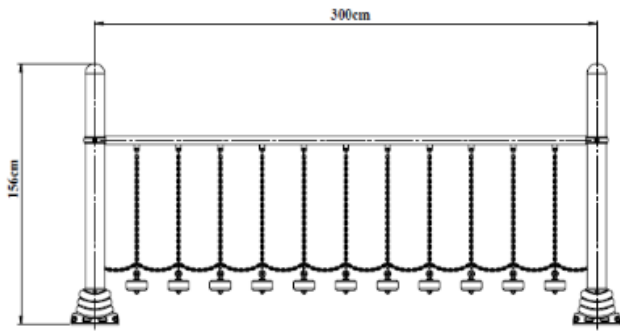


PC-47

Fence Bridge

- From the SDM pipe with a diameter of 114 mm, the cut points of the horizontal and vertical pipes are connected with doetail metal clamps with a wall thickness of at least 3 mm so that they form a right angle to each other.
- The open parts of the 114 mm diameter SDM pipes are detailed to prevent rusting caused by water and moisture, shaped with hemispherical injection molds, closed with self-colored plastic plugs and riveted.
- After the clamp connection is made, there are no protrusions or sharp corners that may cause injury anywhere.
- The fence walking floor is made of self-colored polyethylene LLDPE (Linear Low Density Polyethylene) material with double walls by rotation molding method.
- The dyes used in coloring will be suitable for children's health.
- The swing chains are at least 6 mm thickness and coated with galvanized 25 micron hot-dip.
- The chain channels through which the chain must pass are manufactured ready to use on the product.
- The chains are connected in a double row in a polyethylene protected seat.
- The chains are connected to the bearing wedges, which are joined by welding, with chain locks.
- The chain locks are manufactured with an allen head bolt so that they cannot be easily removed and galvanized coated for corrosion resistance.

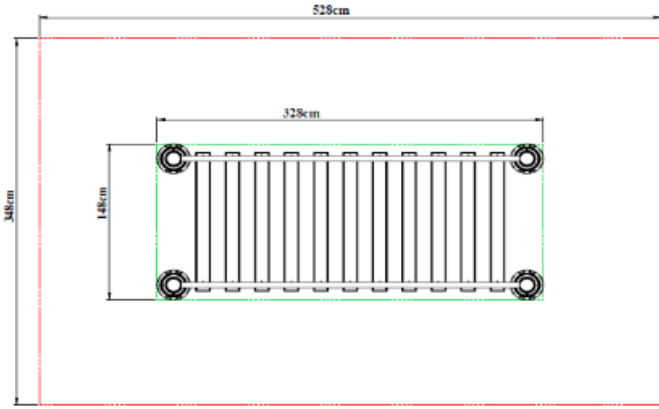

Dimensions	Fence Bridge Length	300 cm
	Fence Bridge Width	148 cm
	Fence Bridge Height	148 cm
	Pipe Thickness	114 mm-60mm