


## PC-48

## Ideal Climbing

- Ideal climbing; It is obtained from special twisted pipes of  $\text{Ø } 114$ ,  $\text{Ø } 60$  and  $\text{Ø } 32$ .
- The pipes are baked for 20 minutes in a  $200^{\circ}\text{C}$  oven after performing polyester-based electrostatic powder coating process.
- The connection points of the pipes with the concrete floor  $20*20*6$  the mm-sized sheet flange is joined by welding method.
- The length of the pipes is not extended by adding, welding or similar processes..

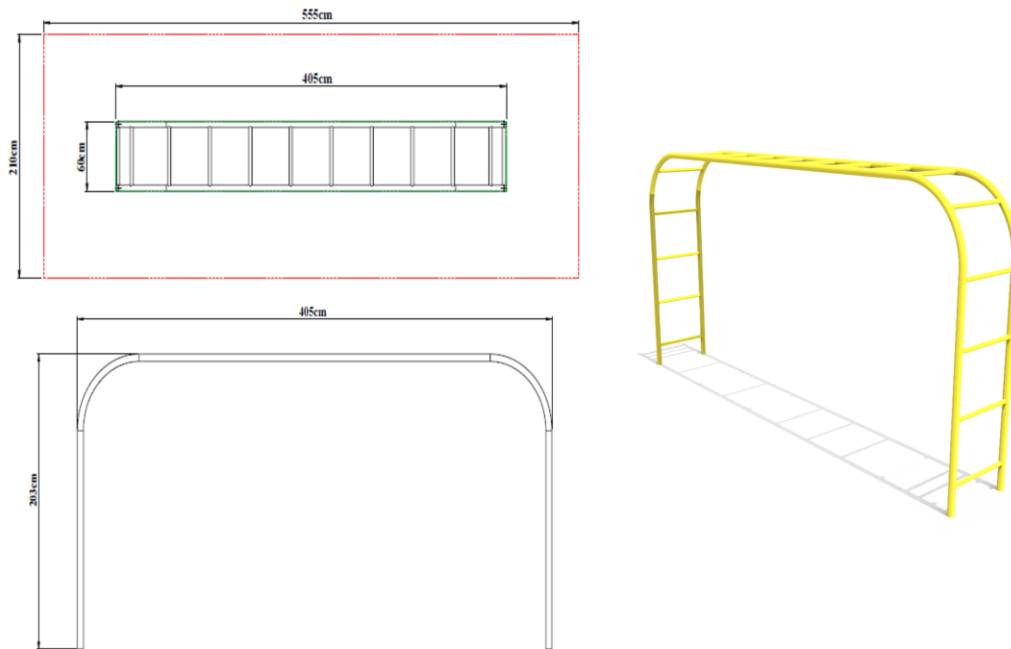

<b>Dimensions</b>	Ideal Climbing Length	405 cm
	Ideal Climbing Height	203 cm
	Ideal Climbing Range	60 cm
	Pipe Thickness	114 mm-60mm-32 mm