
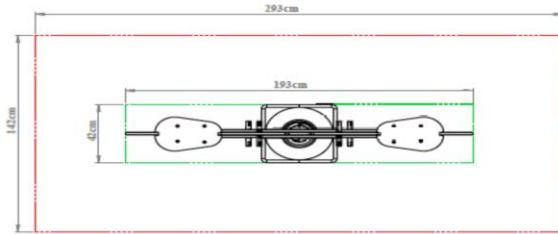


PC-75

Seesaw Springer

- This Seesaw is obtained by cutting the minimum 19 mm HDPE (high density polyethylene) material in accordance with the desired concept on a CNC router machine.
- Optionally, 10 mm HDPE can be placed on a minimum of 19 mm HDPE material as an accessory.
- The parts cut on the router machines are milled and softened so as not to leave any burrs or sharp corners.
- Footrest and hand grip bars are designed and manufactured within ergonomically for comfortable and safe use on the product.
- The front seesaw part is manufactured in 6 pieces.
- 1 spring is used in the product. The cross-sectional diameter of the spring steel used is manufactured in such a way that the minimum diameter of the spring is 19 mm, the minimum overall diameter of the spring is 180 mm and the minimum height is 400 mm.
- It is produced in such a way that there are a minimum of 7 and a maximum of 8 helical windings on the spring element.
- The product is manufactured from cold drawn spring steel, which resists heavy and dynamic loads, in accordance with the TSE EN 1176 standard, with a maximum oscillation of 30 degrees.
- The connection of the product to the ground is made with a minimum of 2 mm thick anchor sheet and dowels.
- Product assembly is provided with the help of sheet metal flanges shaped on the press benches on the forehead of the two springs.
- Protection apparatus is used at both ends to prevent finger and hand jamming on the winding heads.
- In order to prevent rust and increase corrosion resistance, the spring is coated with galvanized and colored with electrostatic paint.

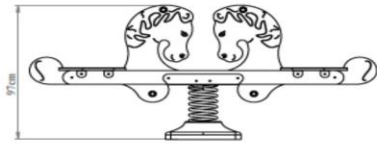

Dimensions	Width	42 cm
	Height	193 cm
	Spring Diameter	18 cm
	Spring Height	40 cm