
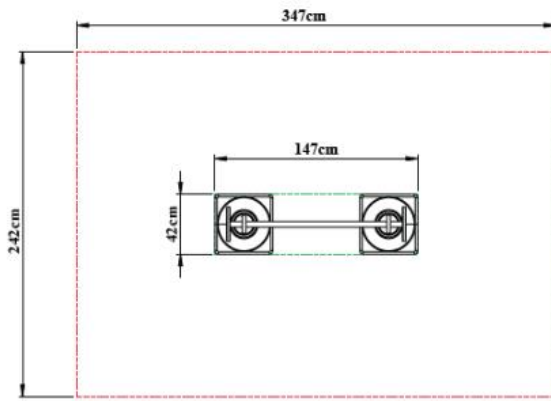



## PD-01

## Upright Barbell

- The main carrier pipes are manufactured from SDM pipes with a wall thickness of at least Ø 139 mm and 2.5-3 mm.
- The anchor covers, which are Ø139 mm in size in accordance with the design so that they fully grasp the carrier pipes, are used to close the open-ended pipes in fitness products.
- Anchor covers are manufactured from polyethylene plastic material by LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV lights and designed in such a way that it does not harm the user
- The unit is manufactured as a double wall and its installation is provided with a screwing system.
- Ø 27 mm twisted pipes are mounted to the carrier pipe by screwing technique
- The Ø 35 pipe or mounted weights are produced as fixed in such a way that they cannot be changed by the user.
- Weightlifting equipment is designed to ensure that the arm and abdominal muscles of the body work in a coordinated manner. Damping wedge is used to prevent finger pinching.
- The product is manufactured to be used individually.
- The main body flashes are manufactured by laser cutting from ST37 sheet metal with a thickness of 8 mm and a size of 280x280 mm.



|                   |        |        |
|-------------------|--------|--------|
| <b>Dimensions</b> | Width  | 42 cm  |
|                   | Length | 147 cm |
|                   | Height | 172 cm |