
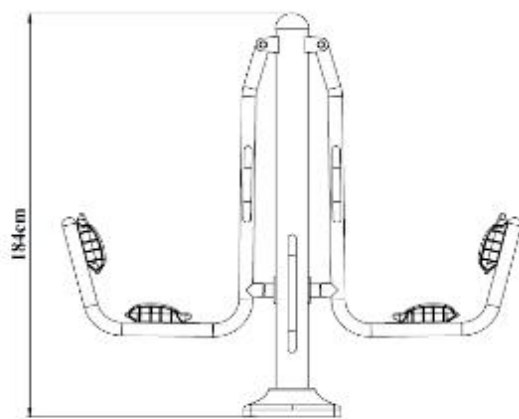
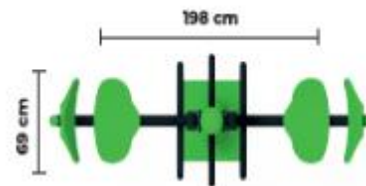


PF-02 Push-off Legs Equipment

- The internal carrier pipes are at least \varnothing 139 mm it is manufactured from a pipe with a length of min 1840 mm and a wall thickness of 2.5-3 mm.
- Anchor plugs with a diameter of \varnothing 139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is produced for indoor and outdoor use.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The moving parts connected to the main body are produced as a single piece with a minimum \varnothing 60 mm and 2.5-3 mm wall thickness and specially bent.
- Two 6205 2RS Bearings are used in the movable U-joint hubs.
- The leg support component, which is welded to the body, is manufactured from \varnothing 33 mm pipe, twisted, in an aesthetic and robust structure.
- Seats and backrests are made of self-colored polyethylene material.
- The foot part is manufactured from specially bent pipe with a diameter of \varnothing 33 mm and a thickness of 2.5-3 mm.
- The main body flashers are laser-cut from 8 mm thick 280x280 mm ST37 sheet, and the flange strength is increased by welding 4 flag sheets.

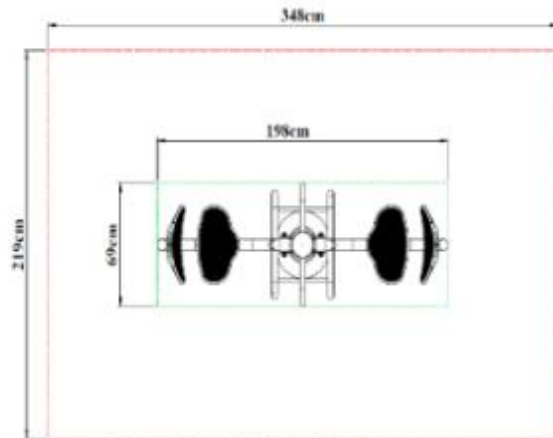

Dimensions	Width	68 cm
	Length	198 cm
	Height	184 cm