
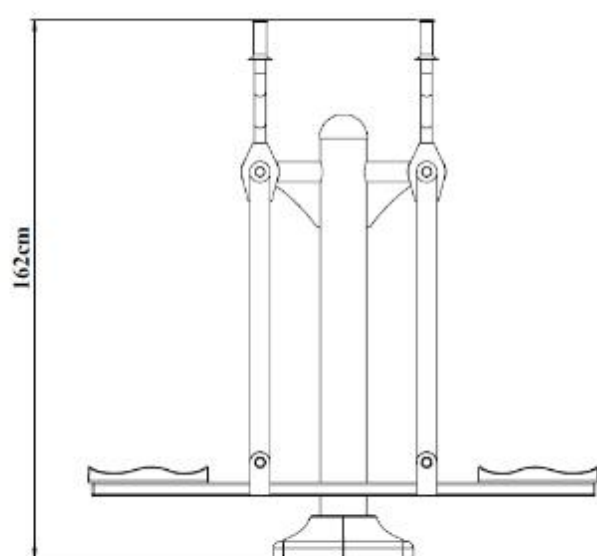
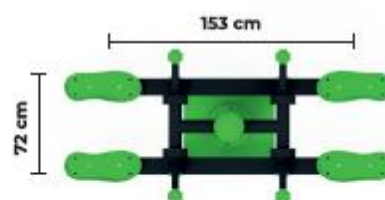


PF-03

Double Walker

- The load-bearing pipes are at least Ø 139 mm and 2.5-3 mm wall thickness and it is manufactured from a min 1530 mm long pipe.
- The upper part of the carrier main body is covered with a pipe cover made of polyethylene material by injection method.
- Anchor plugs with a diameter of Ø139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The moving parts connected to the main body are at least Ø 60 mm and 2.5-3 mm wall thickness.
- The footrest part is manufactured from a 40x80 mm profile with a length of 1500 mm, and a colored footrest made of plastic material by injection method is mounted on it as a footrest.
- The joint connection pipes in the movable section of the walking system are made of Ø 60 mm 2.5-3 mm thick pipes.
- Ø 60 mm joint connection pipes are welded all around the joint connections from the bottom and top.
- Bearings 6205 2 RS and 6006 2RS are used in the Joint Joints.
- Special twisted pipes with a thickness of Ø 33 mm 2.5-3 mm are welded to the upper joint connections.
- Colored rubber pullers are attached to the hand-holding parts.
- The main body flashes are manufactured by laser cutting from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and 4 pieces of flag sheet are welded in order to increase the flange strength.

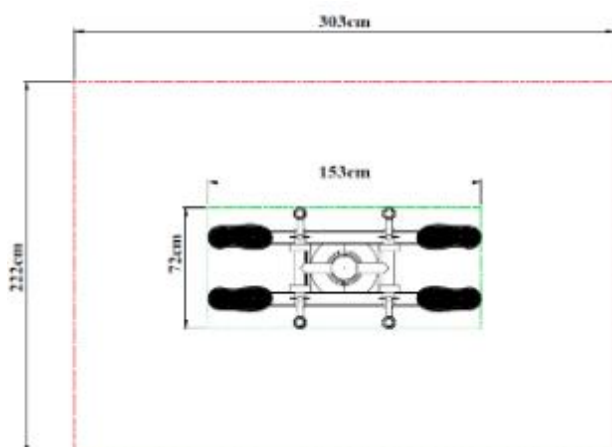

Dimensions	Width	72 cm
	Length	153 cm
	Height	162 cm