
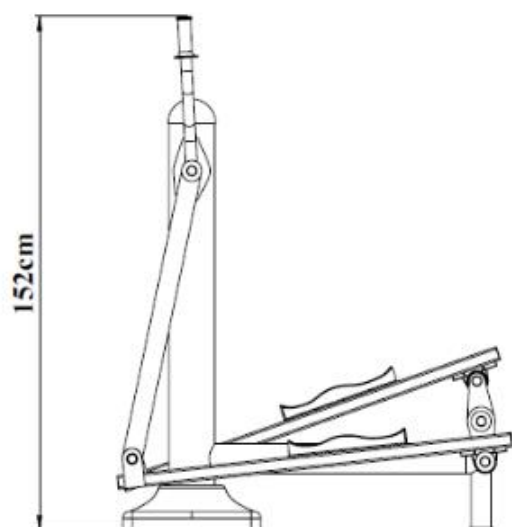
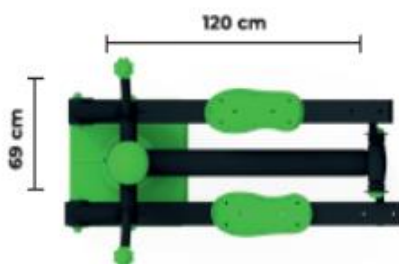


PF-04**Elliptical Walker**

- Carrier pipes should be at least Ø 139 mm and 2.5-3 mm wall thickness min. it is manufactured from min 1520 mm length pipe.
- The upper part of the main carrier body is closed with a pipe cover made of polyethylene material by injection method.
- Anchor plugs with a diameter of Ø 139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The moving parts connected to the main body are at least Ø 60 mm and 2.5-3 mm wall thickness.
- The footrest part is manufactured from a 40x80 mm profile with a length of 1500 mm, and a colored footrest made of plastic material by injection method is mounted on it as a footrest.
- The joint connection pipes in the movable section of the walking system are made of Ø 60 mm 2.5-3 mm thick pipes.
- Ø 60 mm joint connection pipes are welded all around the joint connections from the bottom and top.
- 6205 2 RS and 6006 2RS bearings are used in the joints.
- Handles Special twisted pipes with a thickness of Ø 33 mm 2.5-3 mm are welded to the upper joint connections.
- Colored rubber pullers are attached to the hand-holding parts.
- The main body flashes are manufactured by laser cutting from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and 4 pieces of flag sheet are welded in order to increase the flange strength.

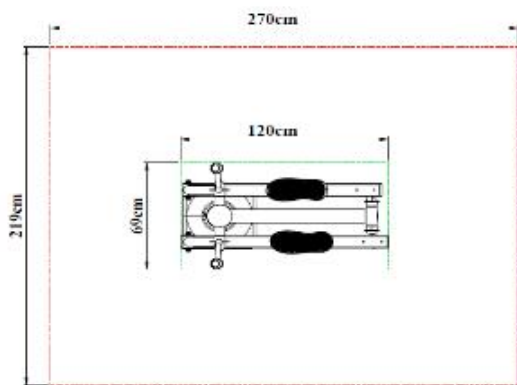

Dimensions	Width	69 cm
	Length	120 cm
	Height	152 cm