
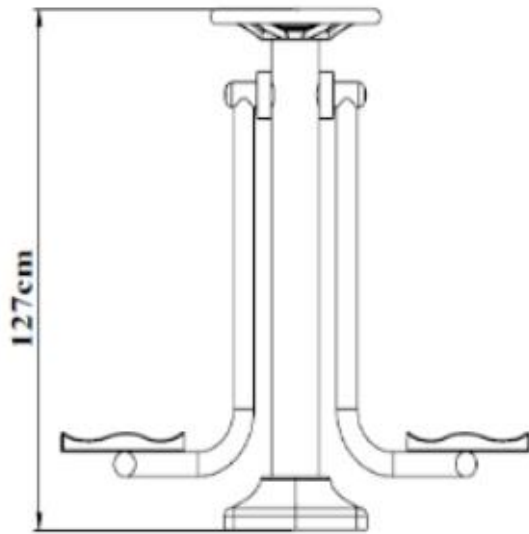
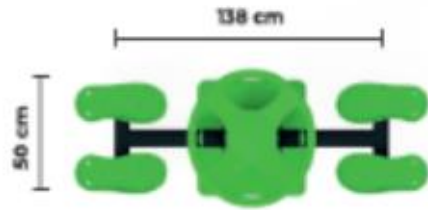


## PF-05

## Double Waist Stretching Equipment

- The carrier pipes are manufactured from pipes with a length of at least  $\varnothing$  139 mm and a wall thickness of 2.5-3 mm and a length of min 1290 mm.
- Anchor plugs with a diameter of  $\varnothing$ 139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The moving parts connected to the main body are at least  $\varnothing$  60 mm and 2.5-3 mm wall thickness.
- 2 pieces of 6006 2RS Ball Bearings are used in the three Movable joint hubs.
- Moving parts are manufactured by bending the pipe with  $\varnothing$  60 mm and 3 mm thickness in accordance with it.
- A circularly bent handle made of  $\varnothing$  33 mm 2.5-3 mm thick pipe is mounted on the main body so that the user can get support with his hands while working.
- In the foot pressing section, there are 4 foot pressing pedals made of fiber-blended polyethylene material by injection printing method.
- In order to prevent the foot from slipping, the patterned edges are raised and the footrest is fixed to a 5 mm thick sheet metal.
- The pivoting shaft, which is connected to the main body, is fixed as one piece by pulling the welding all around, and 4 pcs 6006 2rs bearings are used for the moving parts.
- The main body flashes are manufactured by laser cutting from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and are reinforced with flag sheets with a thickness of 5 mm in order to increase their strength.

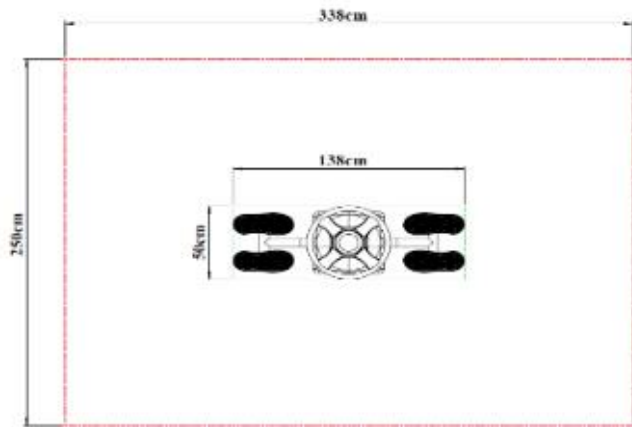

<b>Dimensions</b>	Width	44 cm
	Length	129 cm
	Height	133 cm