
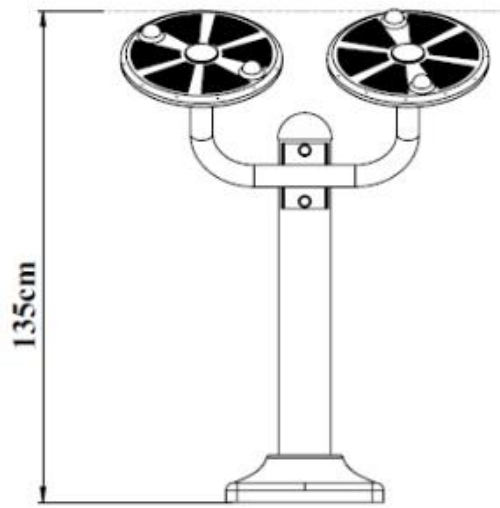
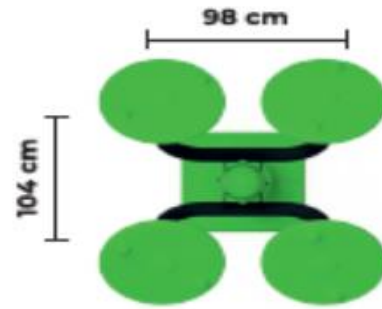


PF-06

Wrist and Arm Exercise Equipment

- The carrier pipes are manufactured from pipes with a length of at least $\text{Ø} 139$ mm and a wall thickness of 2.5-3 mm and a length of min.1160 mm.
- Anchor plugs with a diameter of $\text{Ø}139$ mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The upper part of the main carrier body is closed with a pipe cover made of polyethylene material by injection method.
- The moving parts connected to the main body are at least $\text{Ø} 60$ mm and 2.5-3 mm wall thickness.
- In addition, 2 pieces of 6205 2 RS type bearings are used in each movable hub.
- The connection pipes are twisted from the $\text{Ø} 60$ mm pipe in such a way as to give an aesthetic appearance it is manufactured.
- The connection pipes are manufactured with 5 mm thick sheets in such a way that they can be easily disassembled and installed.
- Lever turning discs are manufactured from polyethylene material in a robust and aesthetic structure.
- There are spinning tops that will make it easier to hold the ball on the playing surface and circular reliefs on the entire surface.
- The main body flashes are manufactured by laser cutting from ST37 sheet metal with a thickness of 8 mm and a size of 280x280 mm.

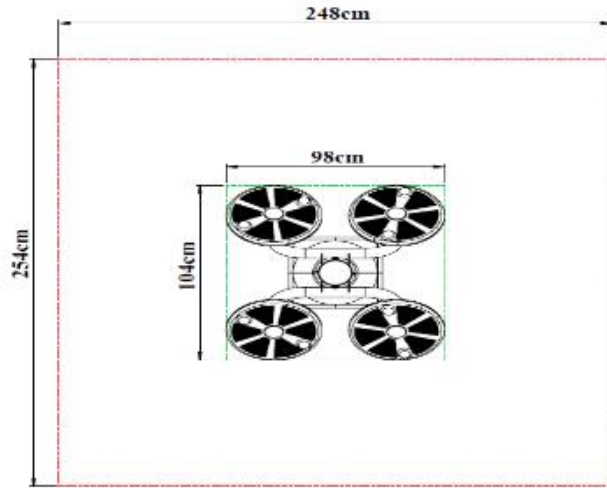

Dimensions	Width	104 cm
	Length	116 cm
	Height	135 cm