
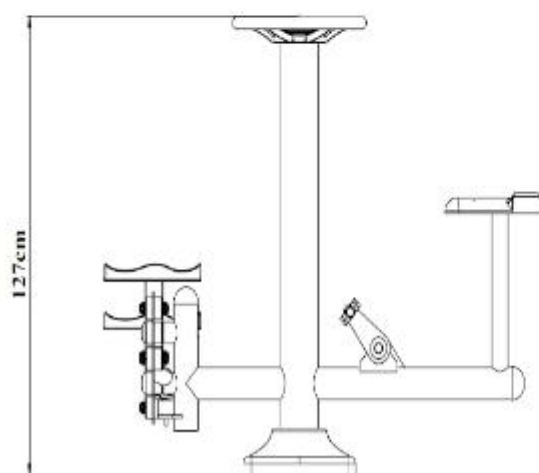
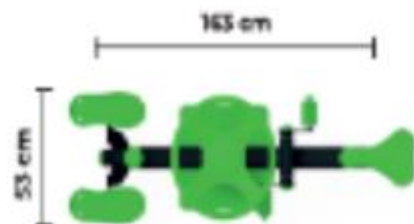


PF-10

Step-Bicycle Equipment

- Carrier pipes are at least Ø 139 mm with a wall thickness of 2.5-3 mm and length of min 1270 mm
- Anchor plugs with a diameter of Ø139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The parts connected to the main body are manufactured with a wall thickness of at least Ø 90 mm and 2.5-3 mm.
- A colored handle made of polyethylene material or a circularly bent handle made of a Ø 33 mm 2.5-3 mm thick pipe is mounted on the main body so that the user can receive support with his hands while working.
- In the product, the bicycle tool seat is produced by injection method from polyethylene material.
- The step play section is assembled and fixed to the play core from 2 pieces of sheet metal with a thickness of 8 mm by welding.
- 2 pieces of Ø 60 mm 40 mm high rubber stopping wedges are used in the movable part.
- Four pieces 6205 2RS two pieces 6006 2RS two pieces 30x55 mm tapered roller bearings are used in the product.
- Stepper tool footrests are made of self-colored plastic material.
- 5 mm thick support sheet is boiled under the footrests.
- The main body flashes are laser cut from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and are reinforced with flag sheets with a thickness of 5 mm in order to increase their strength.
- The movable assembly of the bicycle pedal is fixed with a tapered clamping bearing.
- Bicycle pedals are produced with two pieces of injection polyethylene material and the movable part with bearings.

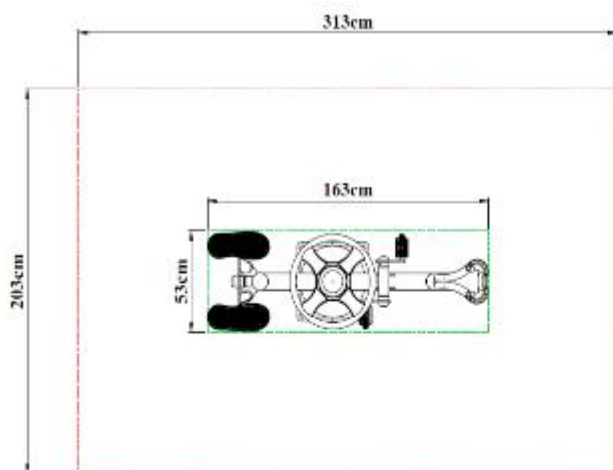

Dimensions	Width	53 cm
	Length	163 cm
	Height	127 cm