
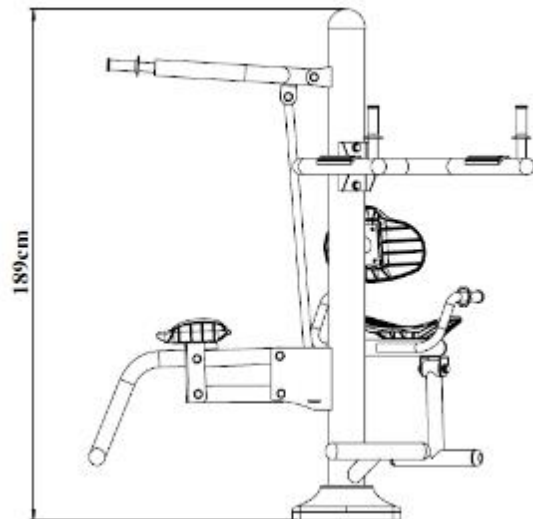


PF-12 Body-Building Equipment

- The product is produced in the form of three stations.
- There are one leg strengthening, one pull-up and one abdominal training station in the product.
- Anchor plugs with a diameter of Ø139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The load-bearing pipes are manufactured from pipes with a length of at least Ø 139 mm and a wall thickness of 2.5-3 mm and a length of 1890 mm
- The moving parts connected to the main body are at least Ø 60 mm and 2.5-3 mm wall thickness.
- The pull-up tool hanger handles and armrest support pipe are manufactured from Ø 60 mm 2.5-3 mm wall thickness pipe specially bent.
- The components connected to the body are mounted with a 5 mm thick 140 connection clamp.
- 2 pcs 6205 2RS Bearings are used in the three Movable U-joint hubs.
- The movable weight part in the Vertical Leg reinforcement station is made of Ø60 mm filled metal material.
- The seat, backrests and armrest plastics are made of self-colored polyethylene material.
- The upper part of the main carrier pipe is closed with a plastic plug.
- Colored rubber pullers are attached to all handle places on the product in such a way that they fit tightly.
- The main body flanges are manufactured from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm by laser cutting and are reinforced with flag sheets with a thickness of 5 mm in order to increase their strength.

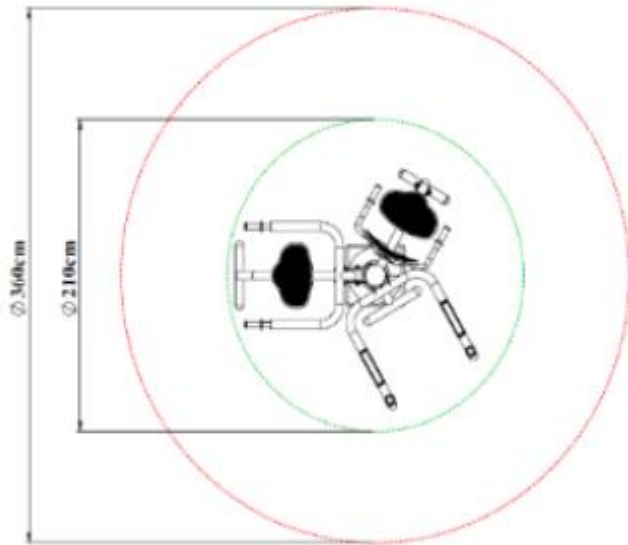

Dimensions	Width	210 cm
	Length	210 cm
	Height	189 cm