
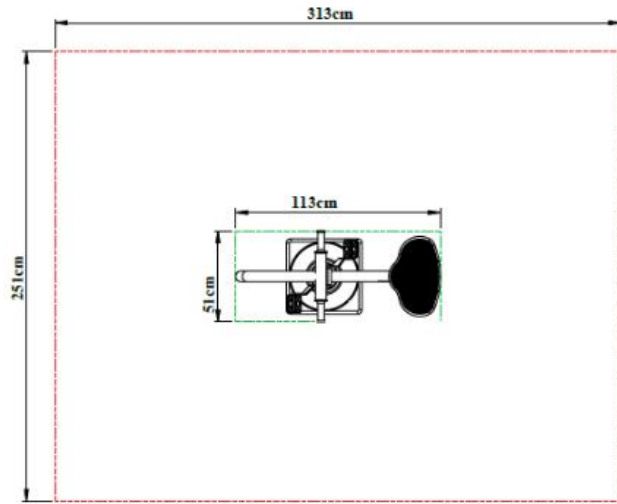



PF-15

Single Bike

- The carrier pipes are manufactured from pipes with a diameter of at least Ø 139 mm and a wall thickness of 2.5-3 mm.
- Anchor plugs with a diameter of Ø139 mm are used to close open-ended pipes in fitness products.
- Anchor caps are produced from polyethylene plastic material with LLDPE (Linear Low Density Polyethylene) injection method.
- It is resistant to UV rays and is designed not to harm the user.
- It is produced as double-walled and assembled with screwing system.
- The parts welded to the main body are manufactured by twisting the Ø 60 mm 3 mm thick pipe accordingly.
- The seats are mounted on Ø 60 mm pipes.
- It is produced in such a way as to allow it to be used in the seats.
- The Front seat is manufactured from polyethylene plastic material by LLDPE (Linear Low Density Polyethylene) injection method.
- The movable assembly of the upper bicycle pedal is fixed with a tapered clamping bearing.
- The upper bicycle pedals are manufactured with two pieces of injection polyethylene material and the movable part with bearings.
- The Handpieces are produced by LLDPE (Linear Low Density Polyethylene) injection method from polyethylene plastic material in such a way that they fit tightly to the pipe that can be held by hand.

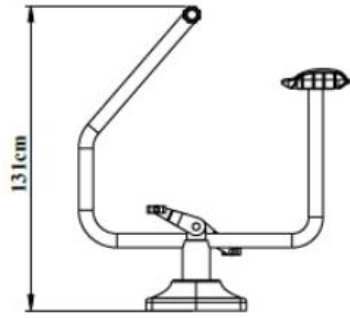

Dimensions	Width	51 cm
	Length	113 cm
	Height	131 cm