
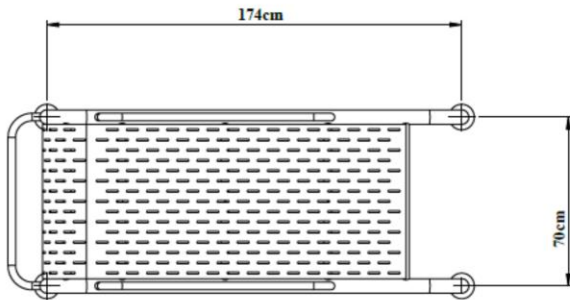



PW-01

- Fitness equipment; Designed to strengthen the muscles of the back, abdomen, shoulder, arm, wrist.
- Carrier pipes Ø 60 mm min. it is designed from bent SDM pipes with a wall thickness of 2.5-3 mm.
- Carrier pipes are fixed to the ground with Ø 106 mm flange.
- The sheet metal is mounted on the platform between the two pipes.
- Hand-held pipes were obtained by bending the Ø 32 pipes.
- Ø 32 pipes, which are used as steps, also support the installation of carrier pipes together.
- It does not have sharp corners, edges and structures that will cause damage.
- All metal parts are painted with electro static paint.

Electro Static Paint

- After all metal parts are manufactured, they are immersed in an iron phosphate bath with 1% concentration at 50 degrees for 15 minutes after rinsing in the dust and degreasing bath with 5% concentration at 70 degrees for 10 minutes.
- Afterward, they are rinsed with clean water again and carried out drying processes.
- Before the static paint process, sanding is applied in a way to prevent rusting, which may be caused by dust and particles that can settle on the metal parts as a result of air circulation during the drying phase during the resting period.
- After this stage, the material is covered with polyester-based powder paint with a thickness of 60-80 microns, which prevents heating (color fading) in the sun, and then it is heated in an oven at a temperature of at least 200-220 degrees for 10 minutes, and the painting process is completed.

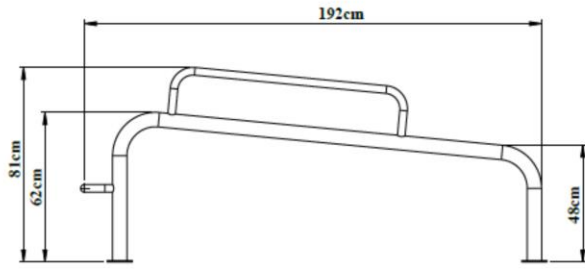

Dimensions	Width	76 cm
	Lenght	174 cm
	Height	62 cm