


PY-126 Straigh Bridge Railing

- The edges of the stair railing are produced from a maximum of Ø 32 mm pipe, and the railings are produced from a minimum of Ø 21 mm pipes.
- Stair railings are painted with polyester-based electrostatic powder paint.
- The railing is produced as a single piece of metal.
- The railing is connected to the carrier pole with the help of polyamide clamps with Ø27 mm pipes at the top.
- It is mounted on the platform with the help of galvanized bolts and nuts from the bottom.

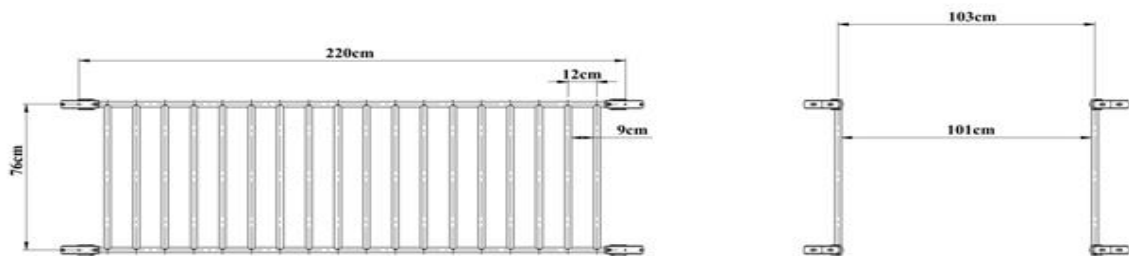

| | | |
|-------------------|-----------------------------------|---------|
| Dimensions | Outer Frame Tube | Ø 32 mm |
| | Frame Inner Tube | Ø 21 mm |
| | Minimum Distance Between Railings | 88 mm |