


## PC-20

## Curved Swing For Parent and Baby

- Curved SDM pipes with a diameter of 114 mm are connected with doetail metal clamps with a wall thickness of at least 3 mm.
- The open parts of the 114 mm diameter SDM pipes are detailed to prevent rusting caused by water and moisture, shaped with hemispherical injection molds, closed and riveted with self-colored plastic plugs.
- In order to close the open-ended pipes; anchor covers made of double-walled self-colored polyethylene plastic material LLDPE (Linear Low Density Polyethylene) are used.
- Inclined mother and baby swing; 4 pcs swing side struts, a minimum of 2.5 m 114 mm and 1 pcs 2 m long 114 mm middle pipe, 1 pcs TPU (thermoplastic polyurethane ) seat and 1 piece of rubber swing seat products were used.
- Rubber swing seat, 48x20 cm in size, is made of self-colored rubber material with steel sheet reinforcement inside.
- Every point of the swing seat that contacts with the air is covered with a rubber coating that is resistant to friction and corrosion.
- Baby swing seat; It is made of TPU (thermoplastic polyurethane) material with a height of 25 cm and a diameter of 30 cm.
- Attached to chains with metal parts.
- The seats are connected to the horizontal pipe with a 40 mm diameter twisted pipe by a chain and mounted.
- The swing chains are at least 6 mm thickness and coated with galvanized 25 micron hot-dip.
- The chains are connected in a double row in a polyethylene protected seat.
- The chains are connected to the bearing wedges, which are welded together on the swing carrier, by chain locks.
- In order for the chain locks to be easily removed, the bolt is manufactured with an allen head and galvanized coated for corrosion resistance.
- Swing chains are manufactured in such a way as to prevent finger jamming of small children and babies.

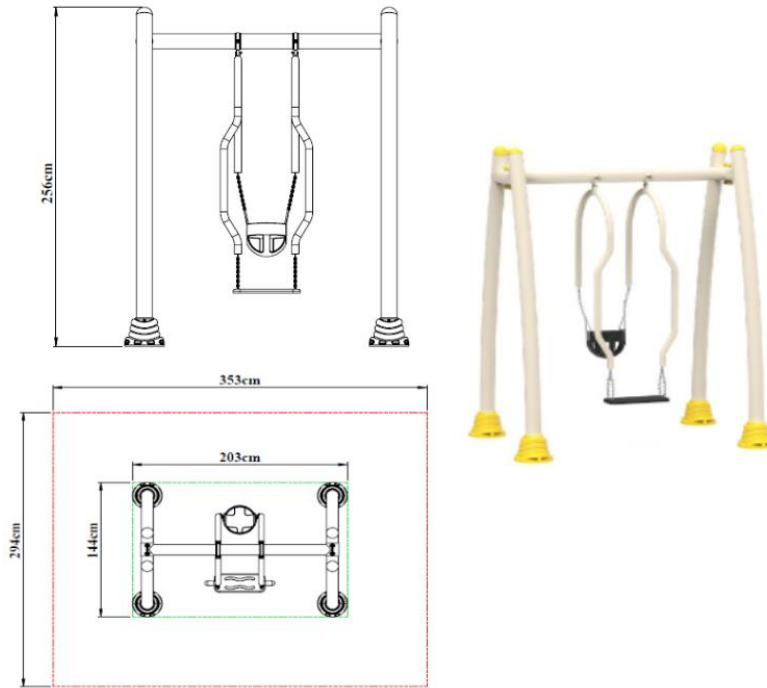

<b>Dimensions</b>	Side pipe Length	256 cm
	Horizontal Pipe Length	203 cm
	Baby Swing Seat Diameter	Ø 30
	Baby Swing Seat Height	25 cm
	Rubber Swing Seat Width	48 cm
	Rubber Swing Seat Length	20 cm
	Minimum Weight of Rubber Swing Seat	1 kg